



电机尺寸
DIMENSIONS:
(UNIT=MM)

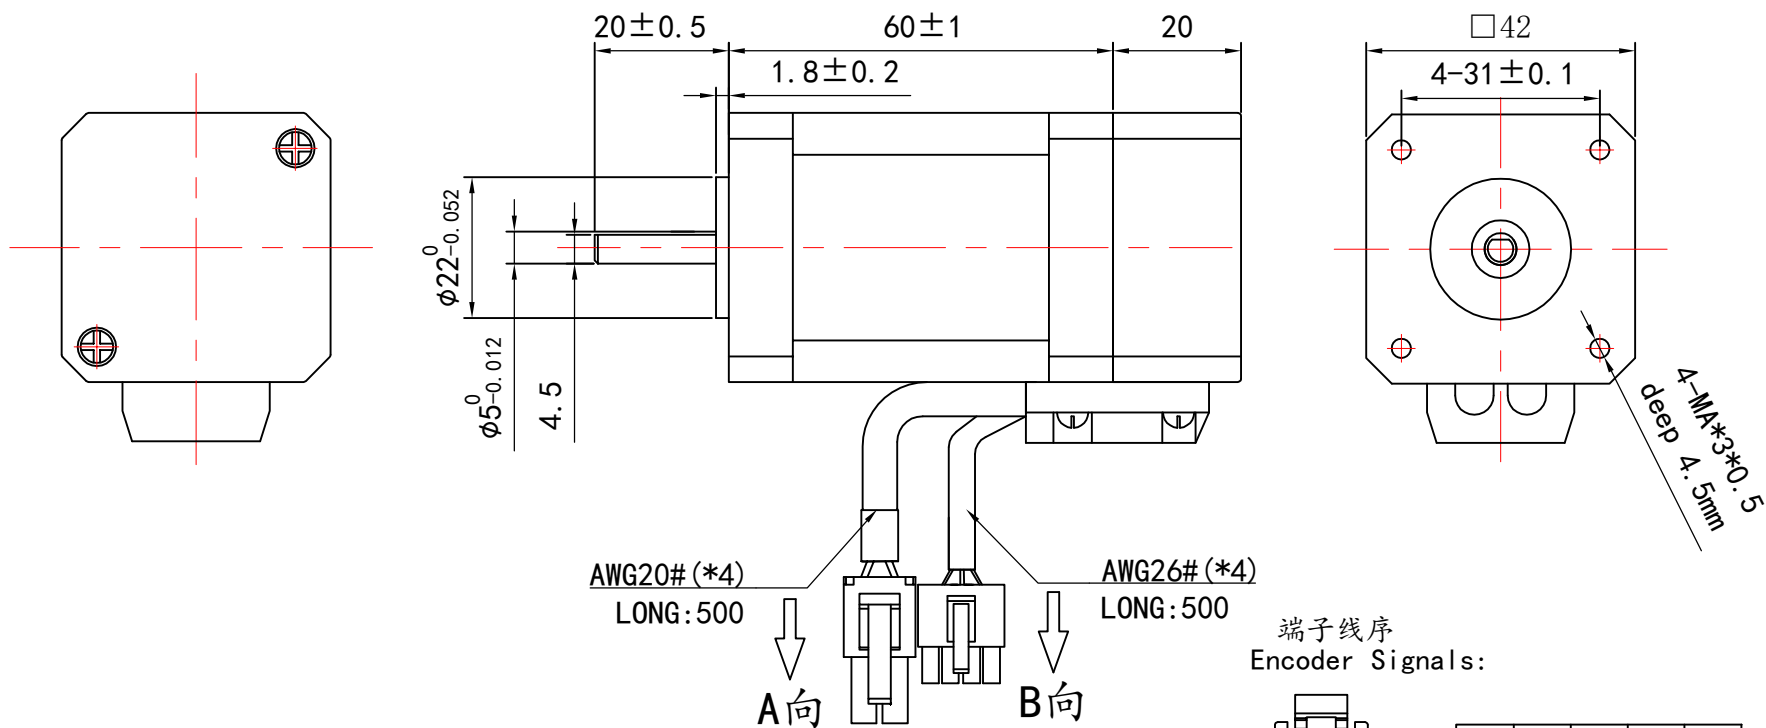


端子线序
Encoder Signals:



PIN	1	2	3	4
颜色	黑	绿	红	蓝
定义	A+	A-	B+	B-

A向



B向


PIN	1	2	5	6	7	8
颜色	红白	红	蓝黑	蓝	黑白	黑
定义	GND	5V	B-	B+	A-	A+

电机参数/ELECTRICAL PARAMETER	
步距角 STEP ANGLE (° /STEP)	1.8
电机电压 RATED VOLTAGE (V)	4.25
电机电流 RATED CURRENT (A/PHASE)	2
电机电阻 RESISTANCE (Ω±15%/PHASE)	1.1
电机电感 INDUCTANCE (mH±20%/PHASE)	2.1
电机力矩 HOLDING TORQUE (N.M)	0.7
编码器分辨率 ENCODER RES	1000
电气强度 ELECTRIC STRENGTH	AC 500V/1min/5mA MAX
转子惯量 THE ROTOR INERTIA(g-cm ²)	110
绝缘等级 INSULATION GRADE	B
重量 WEIGHT (KG)	≈0.6


说明NOTES:

- PLEASE DON'T HOLD MOTOR BY LEAD WIRES.
- PLEASE DON'T PLUG IN/OUT THE MOTOR CONNECTOR WHILE POWER ON.
- PLEASE DON'T DROP, HURL OR DUMP MOTOR AGAINST HARD MATERIAL MALFUNCTION MAY NOT BE OBSERVED AT EARLY STAGE AFTER SUCH SHOCKS, BUT FOUND LATER. THE MISHANDLING VOIDS OUR WARRANTY.
- DONGGUAN ICAN-TECH WILL NOT BE RESPONSIBLE FOR ANY PATENT DISPUTE OR PROBLEM CAUSED BY ACTUAL APPLICATIONS

轴径配置/SHAFT DESIGN



电机接线图 Connection Mode



制图 DESIGNED	检图 CHECKED	校准 APPROVED	日期 DATE	比例 SCALE
JIAJIANG	CHENSHENG		2021/12/1	1:1
SM4204AA-1000A0-CC		东莞市一能机电技术有限公司 DONGGUAN ICAN TECHNOLOGY CO., LTD		
闭环步进电机 STEPPER SERVO MOTOR		第一视角	单位	版本 EDITION
			MM	V1.0